

Effects of Agriculture on Ground Water in a Recharge Area of Guarany Aquifer in Brazil

Antonio L. Cerdeira¹, Maria C.P.Y. Pessoa¹, Denizart Bolonhezi², Marco A.F. Gomes¹, Claudio A. Spadotto¹,
Manoel D. DeSouza¹, Vera L. Ferracini¹, Regina H.C. Queiroz⁴, Vera L. Lanchote⁴,
Sonia C.N. Queiroz¹, Carlos F. Neto³

¹Embrapa-Environment, Research Division of the Brazilian Department of Agriculture, C.P. 69, Jaguariúna, SP, Brazil.
Phone: 55-19-3867-8771. cerdeira@cnpmembrapa.br

²Agronomic Institute of Campinas, APTA, Ribeirão Preto, SP, Brazil.

³DAERP, Water Service Department, Ribeirão Preto, SP, Brazil.

⁴Pharmacy School of São Paulo University, USP, Ribeirão Preto, SP, Brazil

ABSTRACT

The region of Ribeirão Preto City located in São Paulo State, southeastern Brazil, is an important and highly mechanized sugar cane producing area. It is also an important recharge area of the Guarany aquifer, which provides water to several cities and rural communities in the region. Research has been conducted in this region since 1995 to assess the behavior of herbicides, such as atrazine, simazine, ametryn, tebuthiuron, diuron, 2,4-D, picloram, and hexazinone, applied in the area. Nitrate applied as nitrogen fertilizer was also evaluated. Espiraiado watershed, located over the recharge area, was chosen for this study. Water samples were collected from seven wells located inside the watershed and from surface water of Espiraiado stream. Other samples were taken from city wells located at the edge of the recharge area with exception of the control samples that were collected from downtown wells. Results have shown that no residue of herbicide was found in ground water wells and only ametryn was found at levels higher than the Maximum Concentration Level (MCL) of 0.1 µg/L in surface water of the watershed. However, nitrate was detected at levels close to the MCL of 10 mg/L in wells located in downtown, far away from the sugar cane area.

Key Words: Agriculture, Ground Water, Nonpoint Source Pollution, Solute Transport, Water Quality.

INTRODUCTION

Although it was generally accepted that pesticides would not leach to ground water, studies conducted especially in the last decade (Smith et al. 2001, Bower, 1990) have indicated that agrochemical leaching is an important factor of agricultural non-point-source pollution and some North American aquifers were contaminated with both inorganic and organic compounds including some pesticides (Williams et al. 1988).

Herbicide persistence in soil and leaching are potential sources of ground water contamination (Pessoa et al. 2003). The region of Ribeirão Preto city, São Paulo State,

located in Southeast of Brazil, is an important area for sugar cane production, with high level of herbicide and fertilizer utilization. This is also an important recharge area of the Guarany aquifer ground water, which extends to eight Brazilian states and part of Argentina, Uruguay, and Paraguay, with approximately 1,200,000 km². Geological studies in the region have identified a watershed, called Espiraiado (Miklós and Gomes 1996), with high risk of ground water contamination. Certain areas of the Espiraiado watershed are highly permeable sandy soil allowing leaching of agrochemicals applied in crops (Gomes et al. 1996).

Several analytical methods were developed using gas chromatograph/mass spectrometry (GC-MS) to detect and quantify herbicides used in the area in Brazil. (Lanchote et al. 2000, Souza et al. 2000, Souza et al. 2001, Cerdeira et al. 2000, Gomes et al. 2000).

As a tool to understand the interaction among cropping systems, herbicides, soils, and weather factors affecting the fate of the herbicides, various simulation systems can be used, including Chemical Movement in Layered Soils (CMLS-94) (Nofziger and Hornsby, 1994), Pesticide Root Zone Model (PRZM) (Carsel et al. 1995), and Ground water Loading Effects of Agriculture Management System (GLEAMS) (Leonard et al. 1987), among others. Several studies using CMLS-94 to evaluate the tendencies of tebuthiuron, diuron, atrazine, simazine, ametryn, 2,4-D, picloram and hexazinone herbicides in reaching ground water were conducted in the area (Cerdeira et al. 2002, Pessoa et al. 2003). This research was conducted because of the Espirado watershed vulnerability, and its vicinity was chosen to study herbicides and nitrates movement and potential contamination of the water.

MATERIALS AND METHODS

A survey conducted in the area has indicated that the herbicides atrazine, simazine, ametryn, tebuthiuron, diuron, 2,4-D, picloram, hexazinone and nitrate applied as nitrogen fertilizer, were frequently utilized and they were chosen for this study.

Surface and ground water were collected at four month intervals from seven wells located at the Espirado watershed and from six municipal wells located outside of the watershed at the vicinity of the recharge area, during the period of 1995 to 2006 (Table 1).

Herbicides Determination in Water

Water samples (1L) were collected. Herbicides measurements were made from 100 mL of water samples, filtered under vacuum through a membrane of 0.22 µm porosity. The filtrates were extracted with 12 mL

Table 1. Depths and localization of the wells.

Wells	Depths (m)	Localization (South and West)
São Sebastião ¹	197	21° 02' 59" and 47° 44' 09"
Palmares ¹	199	21° 10' 29" and 47° 45' 44"
São José ¹	236	21° 13' 25" and 47° 45' 40"
Recreio Internacional ¹	134	21° 11' 09" and 47° 43' 32"
Central ¹	79	21° 10' 55" and 47° 18' 01"
Portinari ¹	220	21° 09' 44" and 47° 44' 28"
W1 ²	53	21° 13' 40" and 47° 42' 05"
W2 ²	38	21° 14' 30" and 47° 42' 33"
W3 ²	8	21° 14' 49" and 47° 43' 07"
W4 ²	4	21° 14' 50" and 47° 43' 10"
W5 ²	9	21° 14' 42" and 47° 42' 53"
W6 ²	surface	21° 15' 47" and 47° 43' 43"
W7 ²	9	21° 14' 10" and 47° 43' 49"

¹Denotes municipal wells. ²Denotes wells on the recharge area, from 1 to 7.

dichloromethane and shaken for one hour (Ballinova 1993, Durand et al. 1992).

After phase separation, 6 mL of the organic phases were transferred to conic test tubes and evaporated to dryness at 35 °C. The residues were dissolved in 200 µL of mobile phase and 100 µL were chromatographed on a Lichrospher 100 RP-8 column (particle 5 µm, 125 x 4 mm, Merck) using 0.05 M phosphate buffer, pH 5.5, and acetonitrile (73:27, v/v) as mobile phase. Triazine herbicides were detected at 220 nm, whereas tebuthiuron and diuron were detected at 254 nm. (Schlett 1991).

The recovery obtained with the extraction procedure was higher than 95% for all herbicides except simazine for which the recovery was 85.6%. Due to the enrichment in the

extraction procedure and the sensitive detection at the two wavelengths, it was possible to obtain a quantification limit of 0.02 µg/L for the herbicides studied. The method was linear over the range of 0.02 to 2.0 µg/L.

Nitrate was analyzed by Cadmium Reduction Method according to Greenberg, et al. 1992.

Simulation with CMLS-94 Model

The mathematical model of leaching CMLS-94 was used to understand the behavior of the chemicals on the environment. The input data required to use CMLS-94 were: a) crop cultural coefficient of sugar cane (K_c); b) soil type by depths - percent of organic carbon, density ($Mg\ m^{-3}$), volumetric content of water (%) on field capacity, on wilting point, and on saturation; c) weather - daily maximum and minimum temperatures, rainfall (varying between 1300 and 1500 mm/year) and evaporation (the potential evapotranspiration reaching 1000mm/year, based on the Thorntwaite method), d) herbicides properties- adsorption coefficient (K_{oc}) and soil half life ($t_{1/2}$); e) spraying - date and initial dose applied; and f) geographical coordinates (Table 1). K_{oc} and $t_{1/2}$ were evaluated from the soils collected in the area.

RESULTS AND DISCUSSION

Chemical analysis of tebuthiuron, diuron, atrazine, simazine, and ametryn revealed that no residues of these herbicides were detected in ground water. In one sole collection, ametryn residues at concentrations above the Maximum Concentration Level (MCL) (0.17 and 0.23 µg/L) were detected in samples acquired in two locations out of nine from the Espraiado stream. The acceptable maximum level for European standard is 0.1 µg /L.

Very low amount of nitrates residues were detected in ground water of the Espraiado area (Table 2), however, analysis of municipal wells have shown that nitrate levels were detected at higher concentration than the MCL of 10mg/L (Table 3) in downtown well. This well is located away from agricultural sites.

The results obtained by the CMLS-94 simulation (Figure 1) indicate that the applied herbicides did not reach the depth of the confined aquifer (40 m). Hexazinone was found at deepest depth, at 30.0 m. (Figure 1).

In relation to soils, there was a tendency of Quartzarenic Neosol (RQ) soil leaching more than Clayey Eutroferroc Red Latosol (LVef) and Psamitic Distrofic Red Latosol (LVd) (Figure 2).

Table 2. Average values of NO_3 (mg/L) during the years of 1996, 1997, and 1998 in ground water from wells located at the Espraiado watershed.

Wells	1996			1997			1998		
	May	Sep	Nov	May	Sep	Nov	Feb	Apr	Jun
W1	1.0	0.3	0.2	0.8	0.0	0.2	0.0	0.0	0.2
W2	1.0	0.2	0.3	0.5	0.2	0.3	0.3	0.2	0.3
W3	0.3	0.2	0.0	0.0	0.1	0.0	0.0	0.0	0.0
W4	0.6	0.4	0.5	0.7	0.4	0.5	0.5	0.3	0.5
W5	0.4	0.6	0.3	0.4	0.6	0.3	0.0	0.4	0.3
W6	0.8	0.7	0.5	0.6	0.3	0.5	0.2	0.3	0.4
W7	0.5	0.6	0.4	0.5	0.6	0.4	0.4	0.3	0.0

Table 3. Average values of NO₃ (mg/L) during the years of 2005 and 2006 in ground water from wells located at the municipal area of Ribeirão Preto city.

Wells	July 05	March 05	Dec 05	Mar 06	Jun 06	Oct 06
São José	0.5	0.8	0.5	0.2	0.6	0.6
Portinari	0.1	0.1	0.2	0.1	0.0	0.1
Palmares	0.1	0.5	0.3	0.3	0.2	0.0
S. Sebastião	0.3	0.3	0.5	0.2	0.6	0.4
R. Internac.	0.0	0.3	0.4	0.8	0.0	0.1
Central ¹	8.5	11.0	9.3	7.3	8.0	7.0

¹Well located in downtown away from the recharge area.

A non-confined superficial water table found in the watershed with depths varying between zero to 20 m increases the risk of ground water contamination particularly in sandy soil. Thus the simulated results indicate that there is a potential risk of few herbicides to enter in contact with the superficial water table and further investigation must continue in monitoring those risk areas.

CONCLUSIONS

Results have shown that no residue of herbicide was found in ground water wells. Only nitrate was detected at levels close to MCL of 10 mg/L in wells located in downtown

area, which is at further distance of the sugar cane plantations. Among the herbicides, only ametryn was found at levels higher than the MCL of 0.1 µg/L in surface water of the watershed. Simulation has shown that the herbicide hexazinone could reach the deepest depth, at 30.0 m, and the leaching was higher in sandy soils, Quartzarenic Neosol (RQ).

REFERENCES

Balinova A (1993) Solid-phase extraction followed by high-performance liquid chromatographic analysis for monitoring herbicides in drinking water. J Chromatogr 643:203-207.

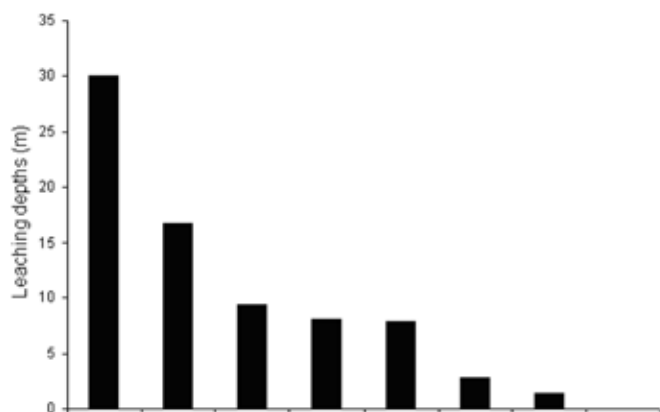


Figure 1. Herbicide depths reached in Quartzarenic Neosol (RQ) soil of the recharge area.



Figure 2. Depths reached by the herbicide hexazinone in different type of soils Quartzarenic Neosol (RQ), Psamitic Distrofic Red Latosol (LVd), and Clayey Eutroferroc Red Latosol (LVef). Simulated for 4 years.

Bouwer H (1990) Agricultural chemicals and ground water quality. *J Soil Water Conserv* 42:184-189.

Carsel RF, Mulkey LA, Lorber MN, Baskin LB (1985) The pesticide root zone model (PRZM): a procedure to evaluating pesticide leaching threats to groundwater. *Ecol Model* 30:49-69.

Cerdeira AL, Gomes MA, Pessoa MCPY, Queiroz RC, Bonato PS, Lanchote VL (2000) Tebuthiuron in soil and groundwater in sugar cane area in Brazil. *Boll Chim Igien* 51:51-57.

Cerdeira AL, Pessoa MCPY, Bonato PS, Queiroz RHC, Lanchote VL (2002) Resíduos e lixiviação do herbicida picloram em água, em área de cana-de-açúcar. *Rev Bras Herb* 3:75-81.

Durand G, Bouvot V, Barceló D (1992) Determination of trace levels of herbicides in estuarine waters by gas and liquid chromatographic techniques. *J Chromatogr* 607:319-327.

Gomes MAF, Spadotto CA, Luiz AJB, Neves MC (1996) In Método de classificação preliminar dos potenciais de infiltração e de escoamento superficial da água do solo: subsídio à avaliação do risco de contaminação por agroquímicos, Proceedings of the XIII Latin American Soil Science Meeting, Água de Lindoia, Brazil, Aug 4-8, 1996; Brazilian. Soil Science Society: Viçosa, MG, Brazil, 1996; CD-ROM.

Gomes MAF, Spadotto CA, Lanchote VL (2000) Ocorrência do herbicida tebuthiuron na água subterrânea da microbacia do córrego espraído, Ribeirão Preto/SP. *Pesticidas* 11:65-77.

Greenberg AE, Clesceri LS, Eaton AD (1992) Standard Methods for the Examination of Water and Wastewater, 18th Edition. American Public Health Association.

Washington, DC, USA. pp.1220.

Lanchote VL, Pierina SL, Cerdeira AL, Santos NAG, Carvalho D, Gomes MAF (2000) HPLC screening and GC-MS confirmation of triazine herbicides residues in drinking water from sugar cane area in Brazil. *Water Air Soil Poll* 118: 329-337.

Leonard RA, Knisel WG, Still DA (1987) GLEAMS: Groundwater Loading Effects of agricultural management systems. *Transactions of ASAE*. 30:1403-1418.

Miklós AAW, Gomes MAF (1996) Levantamento semidetalhado dos solos da bacia hidrográfica do Córrego do Espraído, Ribeirão Preto- SP. Embrapa/Meio Ambiente, Jaguariuna, SP, Brasil. 48p.

Nofziger DL, Hornsby AG (1994) CMLS-94-Chemical Movement in Layered Soils. Oklahoma: Department of Agronomy - University of Florida. 76p.

Pessoa MCPY, Gomes MAF, Neves MC, Cerdeira AL, Souza MD (2003) Identificação de áreas de exposição ao risco de contaminação de águas subterrâneas pelos herbicidas Atrazina, Diuron e Tebutiuron. *Pesticidas* 13:111-122.

Schlett C (1991) Multi-residue analysis of pesticides by HPLC after solid phase extraction. *Fresen J Anal Chem* 339 344-347.

Smith S, Johnson RM, Pepperman AB (2001) Formulation and tillage effects on atrazine and alachlor in shallow groundwater in upland corn production. *Bull Environ Contam Toxicol* 67:113-121.

Souza MD, Boeira RC, Gomes MAF (2000) Adsorção e dessorção de diuron em solos tropicais. *Pesticidas* 10:113-124.

Souza MD, Boeira RC, Gomes MAF, Ferracini VL, Maia

AHN (2001) Adsorção e lixiviação de tebuthiuron em três tipos de solo. Rev Bras Cienc Solo 25:1059-1067.

Williams WM, Holden PW, Parsons DW, Lorber MN (1988) Pesticides in groundwater database. US Environmental Protection Agency: Washington, DC, USA, 30pp.